

# JVS-N4232SL


3.0MP Starlight PoE IP Dome Camera



## Key features

- Resolution 2048x1520@30fps
- Starlight function
- 3.6mm Lens with wide viewing angle
- 35x IR-LED, Up to 20 Meters
- Ingress Protection IP66
- Motion Detection with Email Alert
- CloudSEE Embedded
- ONVIF 2.4, Compatible with ONVIF Recorder

## Dimension(mm)

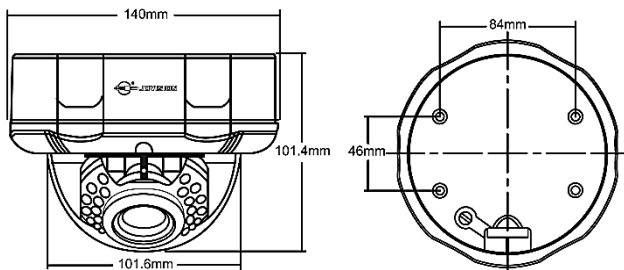

## Accessories:



JVS-AU1003

## Specifications

Video	
Image Sensor	1/2.8" CMOS
Max Resolution	2048x1520
Effective Pixels	3.0 MP
Video Compression	H.264/H.265
Framerate (fps)	2048x1520@30fps
Bit Rate	409Kbps~8Mbps
Illumination	0Lux (IR ON)
Lens	
Lens	3.6 mm
Viewing Angle	H: 79.6°, V: 47.7°, D: 97.8°
IR-Distance	Up to 20 Meters
IR-LEDs	35 Pcs
Function	
Email Alert	Support
Day& Night	Support
DWDR	Support
Defog	Support
White Balance	Auto
3D Noise Reduction	Support
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
9:16 Corridor mode	Support
Privacy Mask	Support 8 Rectangle Areas
Auto IP Configuration	Support
Remote Control	System /Stream/ User/ Network Management
Auto White Balance	Support
Auto Exposure Control	Support
Network	
Ethernet	10M/100M Ethernet RJ45 Port
Stream	3X Streams
Wi-Fi	Not Support
ONVIF	ONVIF 2.4
User	Up to 13 Users
Browser	IE8+, Chrome18+ ~ 42-
Smart Phone	iOS/Android
Protocols	HTTP, TCP/IP, ICMP,RTSP, RTP, UDP, SMTP, DHCP, DNS
General	
Weights(g)	720g
Working Temperature	-20°C~60°C
Humidity	10%~90%
Power Supply	DC12V/2A, PoE IEEE 802.3af
Consumption	Day ≅ 3W Night ≅ 7W
Water Proof	IP66
Dimension(W*H*D)	139.9x101.4(mm)
Material	Aluminum
EAN	6938449000746